

# STANDARD AFM® / SAND FILTERS

## DCH/P SERIES Ø 415-1260



Ref	ID	Ø D	H	O	M	A	B	I/O	Filt. Surface	AFM® G3 / G2 / G1 (21 Kg) Sand(2-3/0.7-1.2/0.4-0.8)(25 Kg)
212441	DCH/P-415	415	1801	190	305	260	1261	2"	0,13 m <sup>2</sup>	0 / 2 / 6
212446	DCH/P-460	460	1812	190	305	260	1272	2"	0,16 m <sup>2</sup>	0 / 3 / 8
212452	DCH/P-520	520	1832	190	305	300	1237	2"	0,20 m <sup>2</sup>	0 / 3 / 10
212464	DCH/P-640	640	1886	190	355	338	1229	2"	0,30 m <sup>2</sup>	0 / 6 / 15
212472	DCH/P-720	720	1985	190	355	405	1275	2"	0,40 m <sup>2</sup>	0 / 8 / 19
212484	DCH/P-840	840	2070	190	355	430	1300	2 ½"	0,52 m <sup>2</sup>	0 / 10 / 26
212496	DCH/P-960	960	2138	205	420	445	1373	2 ½"	0,70 m <sup>2</sup>	0 / 14 / 33
212410	DCH/P-1010	1010	2000	305	420	425	960	DN80	0,78 m <sup>2</sup>	0 / 16 / 36
212412	DCH/P-1260	1260	2070	305	420	505	935	DN100	1,21 m <sup>2</sup>	0 / 26 / 56

### DCH/P SERIES 1200 BED HEIGHT

### ADDITIONAL OPTIONS


Design pressure 2,5 Kg/cm<sup>2</sup> | Test pressure 3,75 Kg/cm<sup>2</sup>.  
 Lateral access manhole.  
 Nozzle plate steel reinforced filter.  
 Complete nozzle plate reliability.  
 Internal steel reinforced filter.  
 Special diffuser for Sand / AFM®.  
 Female threads (GAS) in GRP are part of the body.  
 Large diameter internal piping designed for both Sand / AFM® requirements.  
 Sight glass.  
 DCH/P 1010 & DCH/P 1260 Flanged connections.

Additional sight glass.  
 High temperature.  
 Available for higher pressure up to 7kg/cm<sup>2</sup>.  
 Customizable height.  
 Long vertical sight glass.  
 A2 & B2 connections available. Ask for measures.  
 Flanges available.

### SIGHT GLASS ALWAYS INCLUDED

TYPE 1

TYPE 2

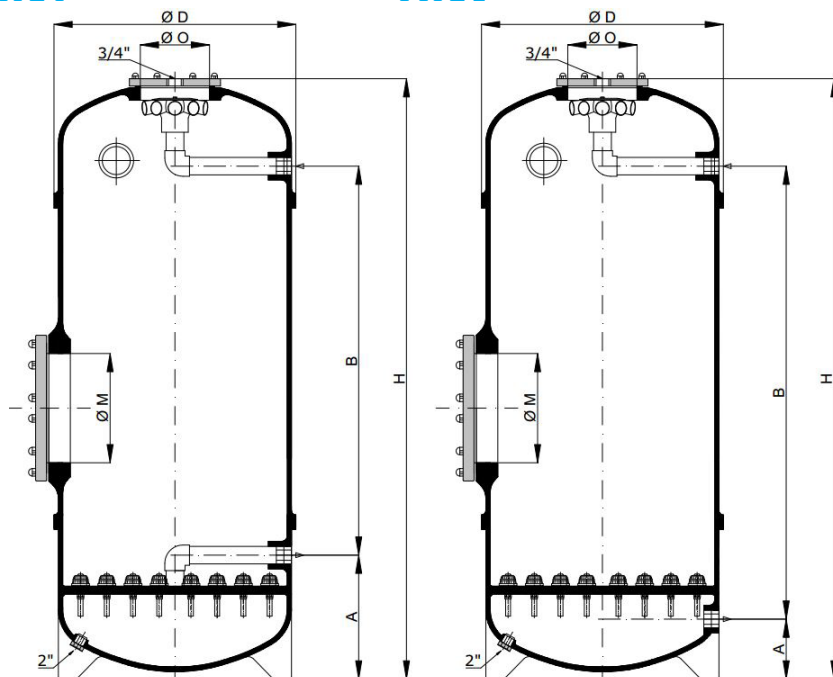

Threaded connections integrated in body

Transparent top lid

Access manhole

Top diffuser

Sight glass

Nozzle plate

Nozzle detail

Drain plug

