

# STANDARD AFM® / SAND FILTERS

## DCH SERIES Ø 415-1260



Ref	ID	Ø D	H	O	M	A	B	I/O	Filt. Surface	AFM® G3 / G2 / G1 (21 Kg) Sand(2-3/0.7-1.2/0.4-0.8)(25 Kg)
212341	DCH-415	415	1801	190	305	260	1261	2"	0,13 m <sup>2</sup>	0 / 3 / 6
212346	DCH-460	460	1812	190	305	260	1272	2"	0,16 m <sup>2</sup>	0 / 3 / 8
212352	DCH-520	520	1832	190	305	300	1237	2"	0,20 m <sup>2</sup>	0 / 4 / 10
212364	DCH-640	640	1886	190	355	338	1229	2"	0,30 m <sup>2</sup>	0 / 7 / 16
212372	DCH-720	720	1985	190	355	405	1275	2"	0,40 m <sup>2</sup>	0 / 9 / 20
212384	DCH-840	840	2070	190	355	430	1300	2 ½"	0,52 m <sup>2</sup>	5 / 5 / 30
212396	DCH-960	960	2138	205	420	445	1373	2 ½"	0,70 m <sup>2</sup>	6 / 7 / 40
212310	DCH-1010	1010	2000	305	420	425	960	DN80	0,78 m <sup>2</sup>	6 / 6 / 48
212312	DCH-1260	1260	2070	305	420	505	935	DN100	1,21 m <sup>2</sup>	10 / 10 / 70

### DCH SERIES 1200 BED HEIGHT


### ADDITIONAL OPTIONS

Dimensions in mm.

Design pressure 2,5 Kg/cm<sup>2</sup> | Test pressure 3,75 Kg/cm<sup>2</sup>.  
 Lateral access manhole.  
 Internal steel reinforced filter.  
 Sight glass.  
 Special diffuser for Sand / AFM®.  
 Female threads (GAS) in GRP are part of the body.  
 Large diameter internal piping designed for both Sand / AFM® requirements.  
 Laterals designed for proper filtration and backwash.  
 DCH 1010 & DCH 1260 Flanged connections.

Additional sight glass.  
 High temperature.  
 Available for higher pressure up to 7 kg/cm<sup>2</sup>.  
 Customizable height.  
 Long vertical sight glass.  
 Flanges available.

### SIGHT GLASS ALWAYS INCLUDED

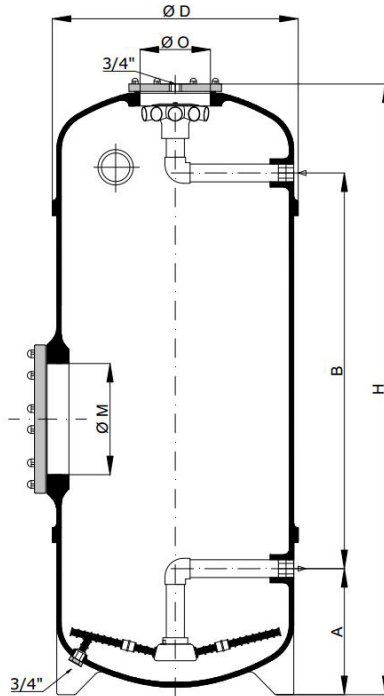

Threaded connections  
integrated in body

Transparent top lid

Access manhole

Top diffuser

Sight glass

Laterals

Drain plug

